

# JACKHAMMER 100 kHz

LOW-NOISE, HIGH-REP MID-IR DETECTION

This is a powerful detection system for high repetition rate mid-IR laser systems, capable of shot-to-shot acquisition at up to **100 kHz** with very low noise.

## APPLICATIONS

- Time-resolved IR spectroscopy
- 2D IR spectroscopy
- 2D Electronic-IR spectroscopy

“100 kHz laser systems  
require 100 kHz detection”


## CAPABILITIES & FEATURES

- Shot-to-shot acquisition mode
- Average-on-chip acquisition mode
- LabView™ control & acquisition VIs
- Extremely low-noise
- External channel acquisition
- USB Connectivity

## PRELIMINARY PERFORMANCE

Wavelength Range	~3 - 10 $\mu\text{m}$ (1000 - 3333 $1/\text{cm}$ )
Source Laser Repetition Rate	$\leq$ 100 kHz
Number of Pixels	32-128
External Channels	1 per every 32 pixels
Digital Resolution	16-bit (65,536 counts)
Effective Dynamic Range	typ. 10,000:1
Dark Noise (st. dev.)	typ. 6 counts

## DARK NOISE

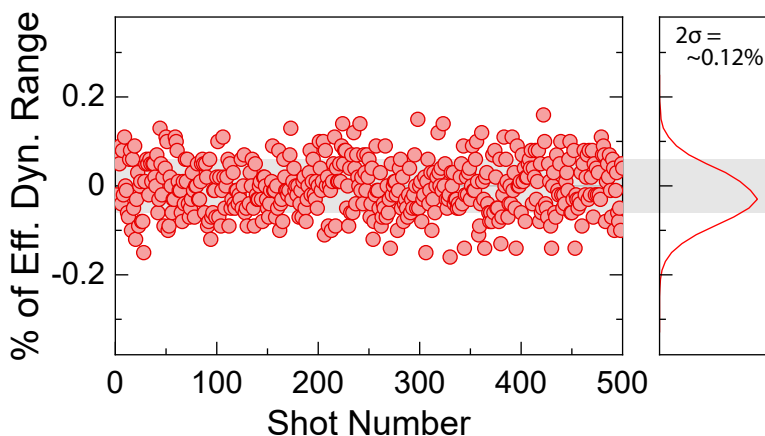

**UPGRADE**  
Buy high-rep electronics  
separately to upgrade an  
existing MCT detector.

Electrical design by Prof. Dr. Peter Hamm (University of Zurich) after decades of experience building acquisition systems for ultrafast experiments.

We follow a policy of continuous product development. Performance subject to change without notice. LabView™ is a trademark of National Instruments. Neither PhaseTech Spectroscopy, Inc., nor any software programs or other goods or services offered by PhaseTech Spectroscopy, Inc., are affiliated with, endorsed by, or sponsored by National Instruments.